

... FLEXline

kvm-tec customized System

INDUSTRYFLEX *line* -

crisis proofed and likes it hot !

for industrial use at temperatures up to 55 degrees ambient

ultra-flat housings, embedded Sound

compatible with standard network components and included kvm-tec Switching Manager Software

Single redundant in copper and single in fiber

Flexline save space in the rack

4 single extender in 1HE

USB 2.0 in house Development, USB-Save feature, USB Emulation Mode & USB Sharing



www.kvm-tec.com

INDUSTRYFLEX *line*

INDUSTRYFLEX *line* single redundant in copper

INDUSTRYFLEX *line* single redundant is a highly optimized KVM Extender over IP for high temperature ranges. For distances up to 150m in copper at a resolution of 1920x1200@60Hz For point to point connection or in matrix switching systems up to 1000 endpoints.

... smart connections

DVI-D/ DVI-I USB2.0 Extender over IP
single redundant in copper

max resolution 1920 x 1200 @60 Hz

max distance 150m in copper

up to 55 °C / 131 °F

Sound embedded & Sound analog

Full HD Videos in real time

USB Transmission Rate max 480Mbit/s

Firmware flash upgrade without cable

VGA in - DVI out ,RS 232 interface

DVI extension without loss of quality

Features - freeze last image

also suitable for 24V systems

INDUSTRYFLEX *line* - crisis proofed and likes it hot !

suitable for high temperatures up to 55 °C and indestructible flash

Function of the factory partition (program memory) in the flash memory: In case of a power failure during an update, the information in the flash is destructible. kvm-tec has taken precautions and so there is a crisis proofed area in the flash which cannot be overwritten and is therefore indestructible. The extender then starts from the crisis proofed area with the correct information.

REDUNDANT for high security in critical applications The perfect tuning of the kvm-tec video compression with low latency (<5ms) enables a delay-free transmission. USB and video are transmitted via a CAT5e/6/7 cable.

The in-house development of USB 2.0 transparent, Freeze last image and USB save feature.

Softwarefeature

Mouse glide &Switch

up to 16 monitors can be operated with one mouse and keyboard



Full HD
over IP

6014iL Local CPU unit

6014iR Remote CON unit



- Full HD
- ATX
- Single
- 4Units 1RU
- Sound embedded
- LotencyTime 1.38ms
- USB 2.0
- Mouse glide & switch
- PoE
- 1000 Endpoints
- Expandable Endpoints Packages
- 56°C 131°F Hot

Interface

- DVI
- VGA
- RS 232

Upgrades Industryflex included

- USB memory
- Sound analog opt
- VGA
- RS 232

Do you want to learn more? Then simply click on the respective button and you will be forwarded directly to our homepage!


kvm-tec explain:

- Expandable Endpoints Packages
- Interfaced packages
- USB 2.0

Switching Manager Software

The intelligent software solution from kvm-tec for managing all KVM extenders connected in a matrix switching system up to 1000 endpoints. The local and remote parts can be connected or disconnected by touch or mouse click. For a quick overview, the extenders are arranged in an optimized way and the status of the extenders is highlighted in color.


- stores up to 5 various scenarios
 - display of the USER sessions
 - update management for all extenders in the switching system
 - Extender setting definition
 - Multihead groups and static partner
 - Mouse glide&switch
 - 4K Multiview Commander Management
 - unlocking kvm-tec upgrades
 - displays & Update the current firmware version in the Switching System
- Network environment 1Gigabit Bandwith: IGMP Snooping

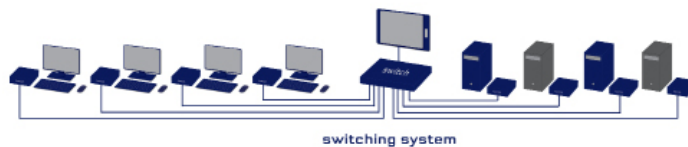

SOFTWARE - FEATURE

Mouse Glide & Switch

with only one mouse and one keyboard, multiple PCs can be operated from one workstation. The arrangement of up to 16 monitors via the Switching Manager can be horizontal or vertical and is comparable to a virtual desktop wall. With the stand alone solution up to 4 screens/PCs can be operated and controlled.

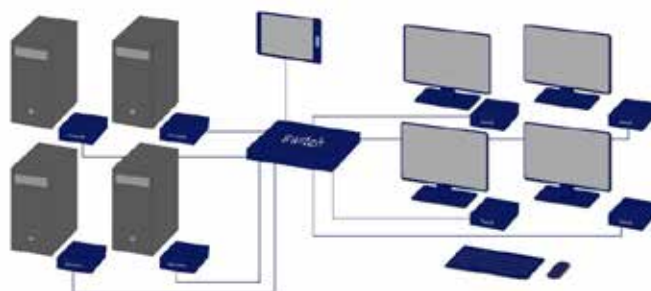

Technical Specifications

		IND-Local/CPU	IND-Remote/CON
Interfaces	Video	1 x DVI in 1 x DVI out	1x DVI-D out
	USB 2.0	1 x USB-B to PC	4 x USB-A (devices)
	Audio	1 x 3,5mm jack (Line In) 1 x 3,5mm jack (Line out)	1 x 3,5mm jack Line In) 1Vpp 1 x 3,5mm lack (Speaker) 2x10mW@32Ohm
Video	Signal type Resolution (digital)	DVI-D max. 1920x1200 @ 60Hz	DVI-D max. 1920x1200 @ 60Hz
	Signal type Resolution (analog) (opt.) Color mode	DVI-I max. 1920x1200 @ 60Hz 24bit	DVI-I max. 1920x1200 @ 60Hz 24bit
Audio	Type	analogue / embedded	analogue/embedded
	Bandwidth	16bit, 44kHz, 2ch	16 bit, 44kHz, 2ch
USB	Specification	USB 2.0	USB 2.0
	Type Rate	transparent max. 480 Mbit/s mass storage devices & camera optional	transparent max. 480 Mbit/s mass storage devices & camera optional
RS 232 interface		transparent up to 115200 baud +/-5V,CTS/DTR handshake	transparent up to 115200 baud +/-5V,CTS/DTR handshake
Casing	Material	anodized aluminum	anodized aluminum
	Dimension (w x H x D)	108 x 43 x 107,5 mm	108 x 43x 107,5 mm
	Weight	4.25 x 1.69 x 4,23 inch	4.25 x 1.69 x 4.29 inch
	Shipping weight SET 1895 g /4.17 lb	295 g / 0.65 lb shipment weight 1005g/2,21 lb	295 g/ 0.65 lb shipment weight 890 g/ 1.96lb
Power Supply	Type	wall power supply unit 12 VDC 2A redundant max 35V	wall power supply unit 12 VDC 2A redundant max35V
Power Input	Operation	12W	12W without USB devices
Operation environment	Temperature Humidity	0 to +55 °C (32 to 131 °F) < 80%, non -condensing	0 to +55 °C (32 to 131 °F) < 80%, non- condensing
Storage environment	Temperature Humidity	-25 to 80 °C (-13 to 176 °F) < 80%, non condensing	-25 to 80 °C (-13 to 176 °F) < 80%, non condensing
Cooling		free air convection	free air convection
MTBF		82.820 calculated hours approx. 10 years	82.820 calculated hours approx. 10 years
Conformity		CE, FCC	CE, FCC
Warranty		2 years (5 years optional)	2 years (5 years optional)
Delivery content	Devices	1 x IND local (CPU)	1 x IND remote (CON)
	Power Supply	1 x wall power supply unit 12V 2A (EU-plug or INT plug)	1 x wall power supply unit 12V 2A (EU-plug or INT plug)
	Cables	1 x DVI - DVI cable 1,8m (5.9ft) 1 x USB cable 1,8m (5.9ft)	
	Mounting	4 x rubber feet	4 x rubber feet
	Manual	Quickinstallation manual download: www.kvm-tec	

Part Number & Short description

Part No.	Order No.		Short description
6014i	IND-SET		INDUSTRYFLEXline Extender Single – Set EAN 0798190003504 UPC 051497032067
6014iL	IND-L		INDUSTRYFLEXline Extender Single – Local Unit /CPU EAN 0798190003511 UPC 051497032074
6014iR	IND-R		INDUSTRYFLEXline Extender Single – Remote Unit /CON EAN 0798190003528 UPC 051497032081
6033	PoE-Set		FLEXline PoE Version Set EAN 0798190109626 UPC 051497113407
6034	PoE-Unit		FLEXline PoE Version Unit EAN 0798190109633 UPC 051497113414
9003 9002	GV5JU GV5J		Warranty extension to 5 years per UNIT Warranty extension to 5 years per SET
ADD-ONS 6231	UMK-FLEX		Rack Mounting Kit for under the table for FLEXline EAN 0798190109466 UPC 051497113247
6232	RMK-FLEX-F		Rack Mounting Kit with front panel for FLEXline EAN 0798190109473 UPC 051497113254
6233	RMK-FLEX-FN		Rack Mounting Kit with front panel and Power supply EAN 0798190109480 UPC 051497113261
6234	RMK-FLEX		Rack Mounting Kit with front panel and redundand Power supply for FLEXline EAN 0798190109503 UPC 051497113285
6235	DINMK-FLEX		Din Rail Mounting for FLEXline EAN 0798190109510 UPC 051497113292
6236	VH -FLEX		Vesa Mounting Kit for Flexline EAN 0798190109527 UPC 051497113308



point to point



switching system

point to point max. distance 150m/492ft in copper

Switching System up to 1000 endpoints